




*Thank you for purchasing Happy Trails products, proudly hand-crafted in Idaho, USA
If you have any questions or concerns about the installation of this product, please
contact us directly at 1-800-444-8770 or e-mail installation@happy-trail.com.*

Before you begin, place the bike on a hard level surface where you have room to work. Lay out the parts included in this kit and compare to the parts list. If any parts or hardware are missing, contact us immediately at the number listed above.

NOTE: When installing HT guards and racks, leave all bolts loose until entire rack is fitted. This allows the rack to move and take up differences in frame constructions.

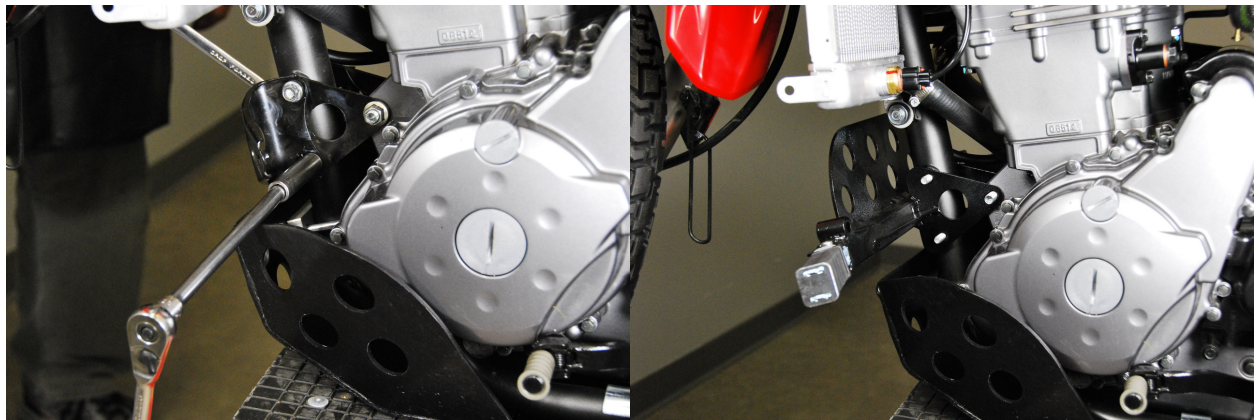

Highway peg installation

Note: We recommend that thread locking compound be used on all bolts when installing our products.

Remove the front engine mount triangles securing the engine to the frame. These triangles will not be used. Install the highway peg in the location of the factory engine mounts. Torque the 10mm bolt to 24 ft/lbs, and the 8mm bolts to 18 ft/lbs.



Hardware List

EG3 Highway Peg
Instructions

Rev. 1
May 28, 2009
J4
HTP4-1-4B-20