

# KAWASAKI KLR250 SU RACK HTP4-6-1



Thank you for purchasing Happy Trails products. Our products are proudly hand made in Boise Idaho, USA. If you have any questions or concerns about the installation of this product, please contact us directly at 1-800-444-8770 or e-mail [installation@happy-trail.com](mailto:installation@happy-trail.com).

Before you begin, place the bike on a hard level surface where you have room to work. Lay out the parts included in this kit and compare to the parts list in these instructions. If any parts or hardware are missing, contact us immediately at the number or email listed above.



**Step 1.** Remove rear bolt on Side panel (pic 1) and rear (bolt) mount on passenger foot peg. (pic 2)

Disconnect turn signal wiring & remove turn signals. (pics 3&4) Remove tool bag to release plate that locks wires in place (pic 6). Note: remove all bolts to free the tail rack and bag.

**Step 2.** Attach the middle mount: Using the 6x40mm bolt, feed the bolt through the tab on the rack, through the 1/2" spacer, threading the bolt into the bike (keep loose) (pic 7).

**Step 3.** Attach the front mount: Using the 8x40mm bolt & nut, feed through the front-most mount (keep loose). (pics 8&9)

# KAWASAKI KLR250 SU RACK HTP4-6-1



**Step 4.** Rear mount & turn signal mounting: Using the turn signal tabs, set it so the end in the picture is tapered to tail light (pics 5&12).




Using the black nylon spacer at the rear rack mounting location (pic 11), and the white spacer at the end with the turn signal (pic 10) attach the turn signal to the end of the tab with the one big hole and two small holes.



**Step 5.** Extending turn signal wires (if necessary). This kit includes wire extensions. Choose a section (I prefer under the seat) cut the two wires, install extensions (pic 15) repeat with other end. Repeat all steps for left side.

**Step 6.** Install bumper (pointing up) with 6x16mm bolts, 1/4" washers, 6mm nuts. (pics 13&14)

**Step 7.** Tighten all hardware, check operation of turn signals.

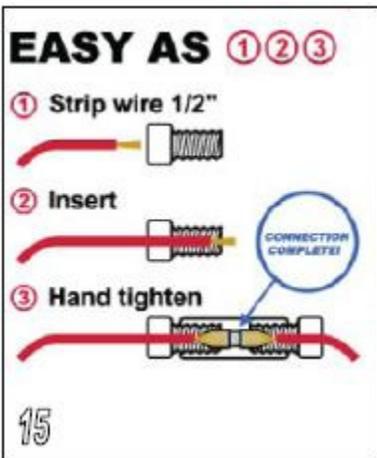

# KAWASAKI KLR250 SU RACK HTP4-6-1

## **Bolt List:**

2 6x40mm bolt  
2 8x40mm bolt  
2 8mm Nuts  
4 6x16mm bolt  
4 6mm nuts  
8 1/4" washers  
2 wire extensions  
2 White Nylon spacers (10mm thick)  
2 black nylon spacers (6.5mm thick)  
2 turn signal tabs (07 KLR)

## **Hardware List:**

Left and Right Rack  
Bumper  
Instructions  
Bolt kit

## **Tools Needed:**

Phillips Screwdriver  
12mm Wrench/Socket  
14mm wrench  
5mm Allen wrench  
6mm Allen wrench  
10mm wrench  
13mm wrench



Happy Trails Products