



Thank you for purchasing Happy Trails products. Our products are proudly hand made in Boise Idaho, USA. If you have any questions or concerns about the installation of this product, please contact us directly at 1-800-444-8770 or e-mail installation@happy-trail.com.

Before you begin, place the bike on a hard level surface where you have room to work. Lay out the parts included in this kit and compare to the parts list on these instructions. If any parts or hardware are missing, contact us immediately at the number or email listed above.

The first step is to remove the seat. This gives you access to the manufacturer's tail rack. Unbolt the rack and place it aside. The hardware will not be reused.

Now take the 3/4" spacers provided in the kit and place them where the OEM rack mounted in the back. See Fig. 1.

Next, run two 8x35 bolts with 8mm flat washers, through the rack's rear mount points, through the spacers, and thread them into the bike. Leave the bolts loose. See Fig 2.

Now, bolt the forward mount points to the bike with two 8x20 bolts and 8mm flat washers where the OEM rack was mounted previously. See Fig. 3

You may now tighten all bolts and replace the seat.

You're ready to ride!

Hardware List:

- | | |
|---|--------------------------------|
| 2 | 8x20 SH bolts |
| 2 | 8x35 SH bolts |
| 4 | 8mm flat washers |
| 2 | 3/4"W x 1/2" L .319 ID spacers |



Fig. 1

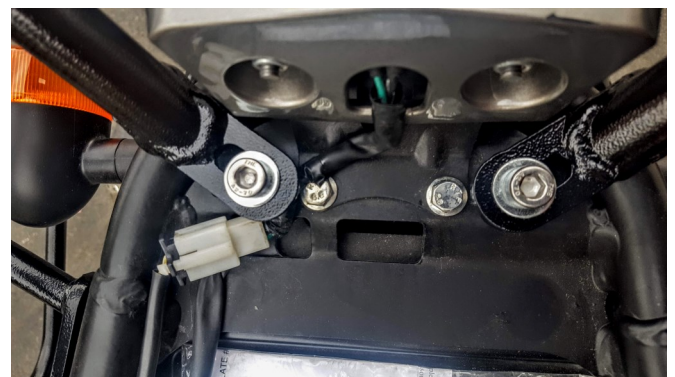


Fig. 2



Fig. 3